

Type **TK17 CNG**

CNG Fuelling Nozzle

for cars at self-service fuelling stations



General

DESCRIPTION



Features

- Left or right single-handed operation
- Compatible with receptacles acc. to NGV1 standard and ISO 14469-1 and 3
- WEH® EASY-TURN 360° swivel joint
- Easy operation
- Extremely high flow rate → short filling times
- Recirculation of the vented gas
- Plastic thermal protection
- Hand grip with magnet
- WEH® Jaw locking mechanism
- Colour coded impact protection (200 bar / 3,000 psi black, 250 bar / 3,600 psi yellow)
- High-grade materials
- Coding for pressure range / gas type

The first WEH user friendly 'Pistol grip' CNG fuelling nozzle has been introduced - now redesigned in the pistol grip style familiar to all fuelling station users. Retaining the same outstanding technical functionality as our TK16 CNG fuelling nozzle, the type TK17 CNG has been remodelled with a sleek new look. The new nozzle is just as quick and easy to use as the common petrol/diesel nozzle and has a similar look and feel. Simply lift the nozzle from the dispenser and place it onto the vehicle's receptacle. Full 360° rotation makes for easy engagement with the vehicle's fuel receptacle. Compress the actuation lever until locking lever engages and the fuelling procedure begins. The natural gas can only flow through the line if there is a safe connection. After refuelling disengage the nozzle's locking lever and disconnect. Please note that refuelling may be stopped or paused at any time. The hand grip has a magnet for actuation of the magnet switch for activation of the dispenser.

Safety

The TK17 CNG offers optimum safety to the operator.

The fuelling nozzle remains connected to the receptacle until the gas between inlet valve and receptacle is depressurized. To achieve optimum performance it is recommended that the TK17 CNG fuelling nozzle is used with the WEH® TN1 CNG receptacle.

Application

Fuelling nozzle for CNG fast filling of cars at self-service fuelling stations to be used with WEH® TN1 CNG receptacles acc. to NGV1 standard and ISO 14469-1 and 3.

TECHNICAL DATA

Characteristic	Basic version	Options
Nominal bore DN	8 mm	On request
Pressure range	B200 acc. to ISO 14469-1 (P30 acc. to ANSI NGV1) PN = 200 bar (3,000 psi) PS = 300 bar PT = 450 bar (black) B250 acc. to ISO 14469-3 (P36 acc. to ANSI NGV1) PN = 250 bar (3,600 psi) PS = 350 bar PT = 525 bar (yellow)	
Temperature range	-40 °C up to +85 °C [-40 °F up to +185 °F]	On request
Material	Corrosion resistant	On request
Sealing material	Natural gas compatible	On request
Design	With plastic thermal protection, gas recirculation and hand grip with magnet	On request
Weight	2 kg (4.41 lbs.)	
Registration	PED97/23/EC: CE0036 The products comply with ANSI NGV1.	

Ordering

ORDERING | Fuelling nozzle TK17 CNG

approx. dimensions (mm)



Part No.	Description	Pressure (PN)	Inlet B (external thread)	Gas recirculation C (external thread)
C1-100529	TK17 CNG	200 bar / 3,000 psi (black)	UNF 9/16"-18*	UNF 7/16"-20*
C1-100077	TK17 CNG	250 bar / 3,600 psi (yellow)	UNF 9/16"-18*	UNF 7/16"-20*

* acc. to SAE J514, 37°


Please see page 14 in catalogue no. 15 onwards for complete hose assemblies consisting of fuelling nozzle, hose set and breakaway coupling.

ACCESSORIES

The following accessories are available for type TK17 CNG:

Dispenser mounting

Mounting for safe attachment of the fuelling nozzle to the dispenser. Optionally with or without switch actuation.
Design: Aluminium, stainless steel

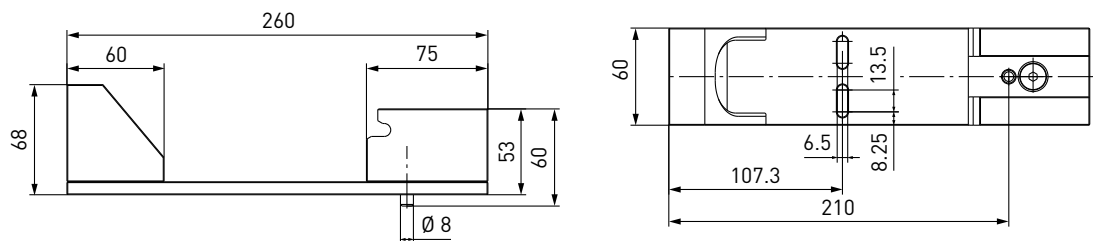


Part No.	Description
C1-66775	Mounting (switch actuated)
C1-65643	Mounting (not switch actuated)



Ordering

Hose sets TK17 CNG - TSA1 CNG (filling and venting hose)

Filling and venting hoses for connecting fuelling nozzle and type TSA1 CNG breakaway coupling, complete with fittings and press-fittings supported by coil spring stubs. Available as single or twin hoses (permanently bonded).

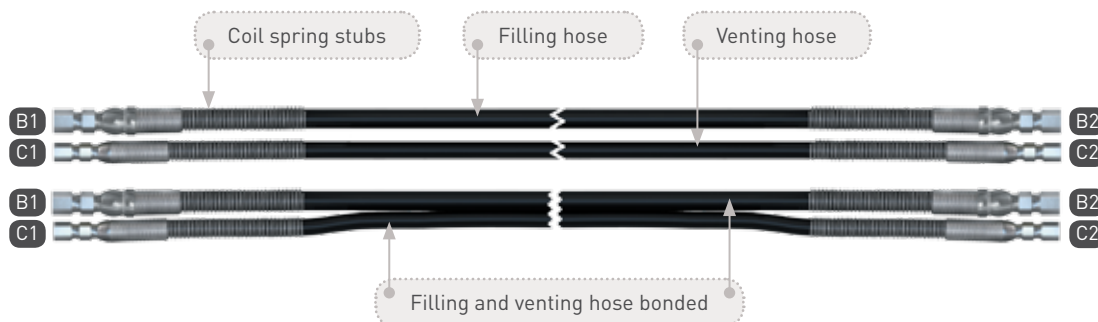

Part No.	Filling hose B1/B2 (internal thread)	Venting hose C1/C2 (internal thread)	Hose length
C1-50487	UNF 9/16"-18*	UNF 7/16"-20*	3 m
C1-42304	UNF 9/16"-18*	UNF 7/16"-20*	4 m
C1-58587	UNF 9/16"-18*	UNF 7/16"-20*	5 m

* acc. to SAE J514, 37°

All designs also available with permanently bonded filling and venting hose. Please contact us!

Hose sets TK17 CNG - TSA2 CNG (filling and venting hose)

Filling and venting hoses for connecting fuelling nozzle / dispenser and type TSA2 CNG inline breakaway coupling, complete with fittings and press-fittings supported by coil spring stubs.

Part No.	Filling hose B1/B2 (internal thread)	Venting hose C1/C2 (internal thread)	Hose length
On request	UNF 9/16"-18*	UNF 7/16"-20*	2.5 0.5 m
On request	UNF 9/16"-18*	UNF 7/16"-20*	3.5 0.5 m
On request	UNF 9/16"-18*	UNF 7/16"-20*	4.5 0.5 m

* acc. to SAE J514, 37°

All designs also available with permanently bonded filling and venting hose. Please contact us!

Ordering

Fittings

Stainless steel fittings for connecting the media inlet 'B' to the filling hose or the gas recirculation inlet 'C' to the venting hose.

Part No.	Description	Connection fuelling nozzle	Connection filling hose
C1-79538	Fitting	UNF 9/16"-18* internal thread	UNF 9/16"-18** internal thread
C1-65592	Fitting	UNF 9/16"-18* internal thread	NPT 1/4" internal thread

* acc. to SAE J514, 37°

** acc. to SAE J1926

Please see page 126 in catalogue no. 15 onwards for a detailed overview on all available fittings.

Spare parts

Various parts are available as spares for type TK17 CNG:



Part No.	Description
E80-78628	① Impact protection (200 bar / 3,000 psi, black)
E80-106830	① Impact protection (250 bar / 3,600 psi, yellow)
E80-84030	② Locking lever
W81541	③ Logo cap
E99-44923	Maintenance spray

When ordering please quote the part no. imprinted on the fuelling nozzle.

Other products

OTHER PRODUCTS

You will find more products in our current catalogue no. 15



Further information on our homepage
www.weh.com

» Contacting

For queries and further information, please do not hesitate to contact us.

Manufacturer:

WEH GmbH Gas Technology

Josef-Henle-Str. 1
89257 Illertissen / Germany

Phone: +49 7303 95190-0

Fax: +49 7303 95190-9999

eMail: ngvsales@weh.com

www.weh.com